
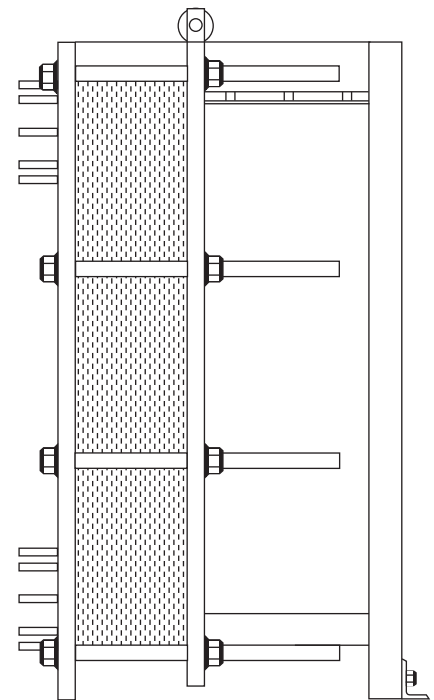


Polaris Plate Heat Exchangers

Technical Specifications					
Model #	Connection	Plate Area	Max. Flow Rate	"A"	"B"
S-04	1-1/4	0.43	75	18.6	7.1
S08	1-1/4	0.86	75	29.4	7.1
S-7	2	0.75	180	23.4	11.1
S-15	2	1.61	180	35.2	11.1
S-20	2	2.15	180	43.1	11.1
S-23	3	1.72	400	39.5	18.1
S-38	3	4.09	400	55.8	18.1
S-21	4	2.47	800	42	18.9
S-47	4	5.27	800	71.85	18.9
S-64	4	7.1	800	87.87	18.9
S-41	6	4.41	1800	61.3	23.94
S-62	6	6.67	1800	77.32	23.94
S-86	6	9.25	1800	92.95	23.94
S-43	8	4.63	3000	59.3	32
S-65	8	6.99	3000	71.1	30.3
S-100	8	10.76	3000	86.8	30.3
S-130	8	14	3000	104.5	30.3
S-152	8	16.36	3000	112.4	30.3
S-220	8	23.68	3000	147.8	30.3
S-80	12	8.6	7000	76.96	38.2
S-120	12	12.91	7000	93.1	38.2
S-187	12	20.12	7000	116.8	38.2
S-250	12	26.9	7000	142.7	38.2
S-200	20	21.53	18000	112.87	53.9

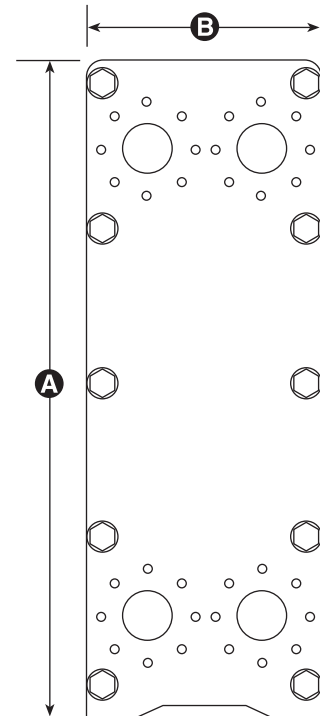

Standard Materials		
Plates		Gaskets
• 304 SS	• 254 SMO	• Nitrile
• 316 SS	• Hastelloy C-276	• EPDM
• Titanium	• Incoloy 825	• VITON

Polaris Plate Heat Exchangers LLC

28 May Street, Edison, NJ 08837 • Phone: 732-225-3100 • Fax: 732-225-9155

sales@polarisphe.com • www.polarisphe.com